


1. Test conditions

RF power	0	dBm	
Room Temperature	23	°C	
Terminating source impedance (ZS):	50	Ω	unbalanced
Terminating load impedance (ZL):	100	Ω	balanced


2. Specifications

	Minimum	Typical	Maximum	Unit
Centre frequency		464.99		MHz
Pass Band	462.5		467.48	MHz
Insertion Loss in Pass Band		2.5	3.5	dB
VSWR in Pass Band			1.9:1	
Rejections				
0 MHz – 350 MHz	55	60		dB
350 MHz – 450MHz	45	52		dB
452.5 MHz – 457.48 MHz	25	31		dB
480 MHz – 500 MHz	32	36		dB
500 MHz – 530 MHz	42	47		dB
530 MHz – 850 MHz	50	60		dB
850 MHz – 1500 MHz	50	55		dB
1500 MHz – 2000 MHz	45	50		dB
2000 MHz – 2500 MHz	40	45		dB
Output phase imbalance	-7	-4	+2	°
Output amplitude imbalance	-1	0	+1	dB
RF power			+20	dBm
Operating temperature range	-10		+85	°C
Storage temperature range	-40		+100	°C
Temperature coefficient of frequency		-30		ppm/°C


	SIPAT Co., Ltd. (CETC No. 26 Research Institute) Nanping Huayuan Road No. 14 Chongqing, China, 400060	Part Number	SF465B	
		Rev. Date	2005-5-26	
		Rev.	PR6.0	Page

3. Matching Network


50 Ω / 100 Ω Configuration

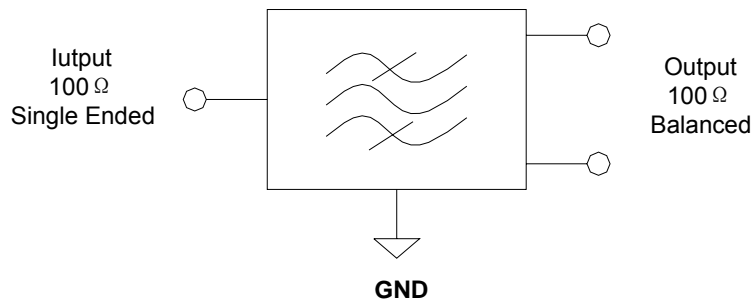



4. Package Dimension

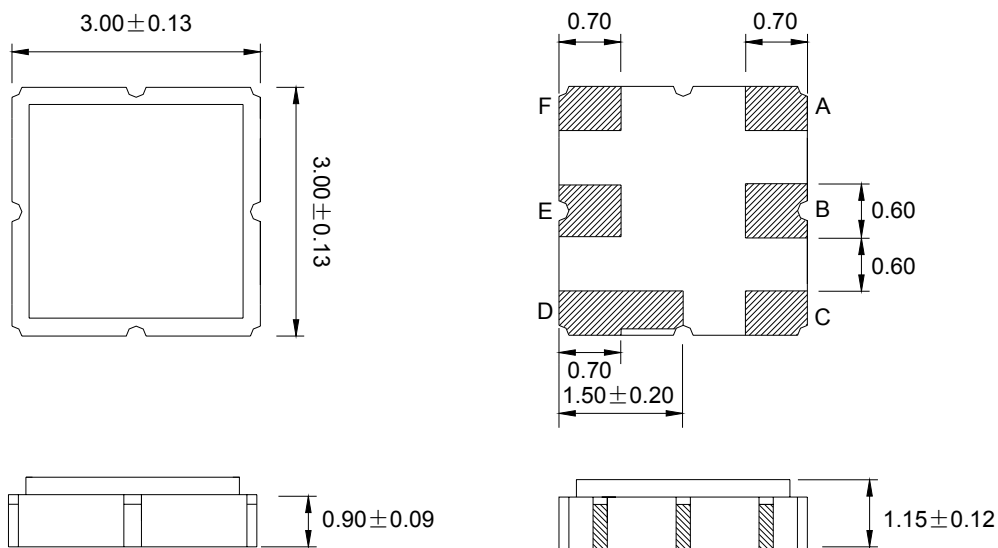


- PinA +RF Out
- PinB Output Ground
- PinC -RF Out
- PinD Input Ground

	SIPAT Co., Ltd. (CETC No. 26 Research Institute) Nanping Huayuan Road No. 14 Chongqing, China, 400060	Part Number	SF465B	
		Rev. Date	2005-5-26	
		Rev.	PR6.0	Page


5. Typical Performance

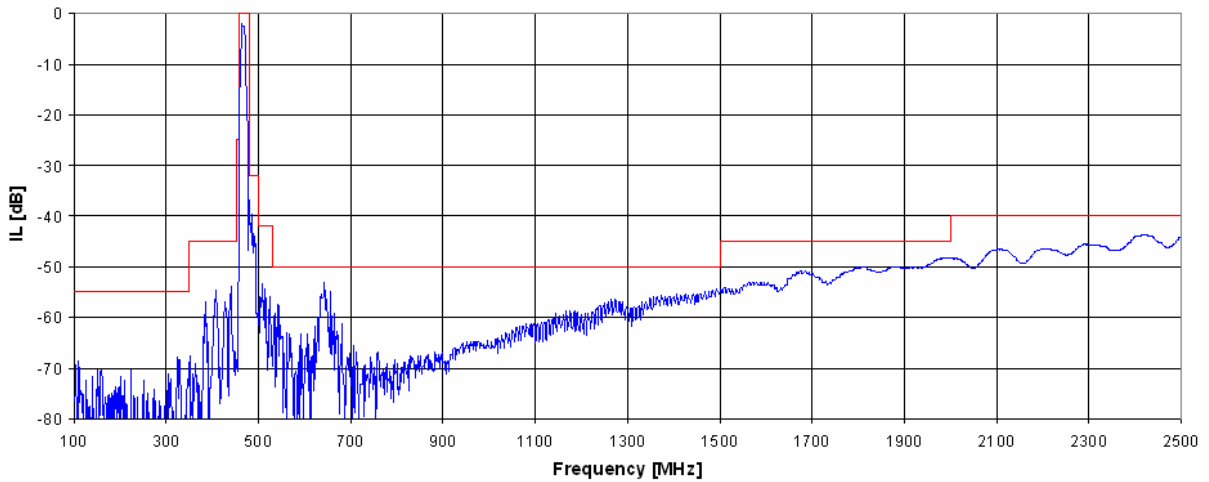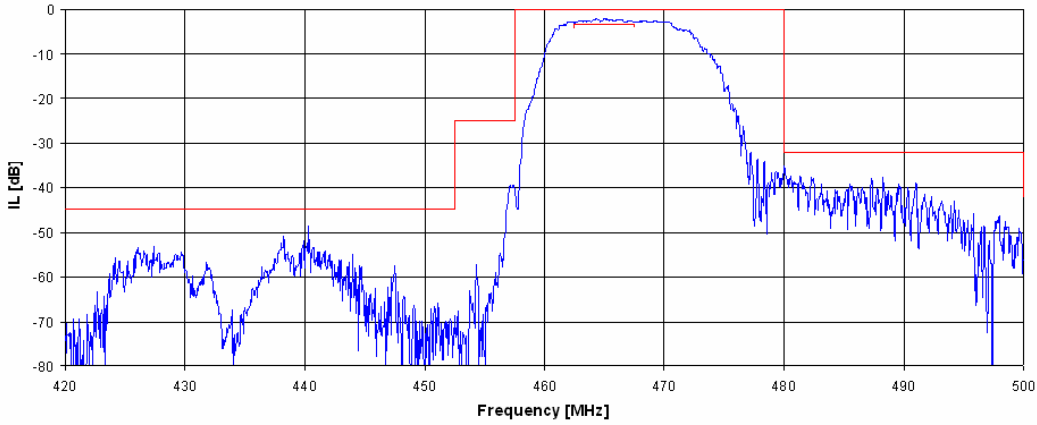


VSWR In

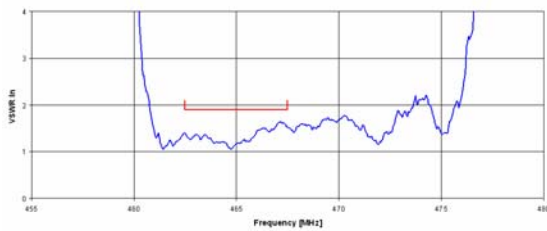


VSWR Out

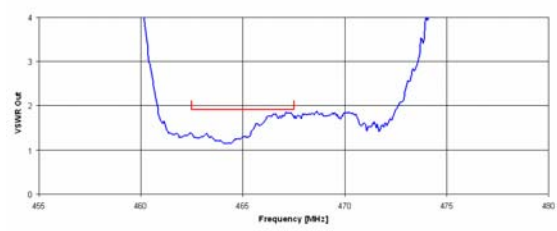


	SIPAT Co., Ltd. (CETC No. 26 Research Institute) Nanping Huayuan Road No. 14 Chongqing, China, 400060	Part Number	SF465B
		Rev. Date	2005-5-26
		Rev.	PR6.0

Amplitude Imbalance

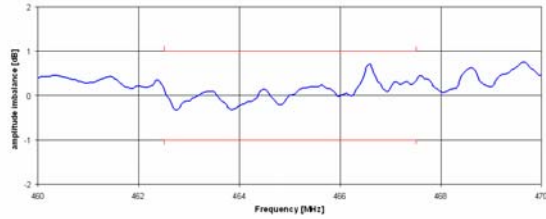


Phasen Imbalance

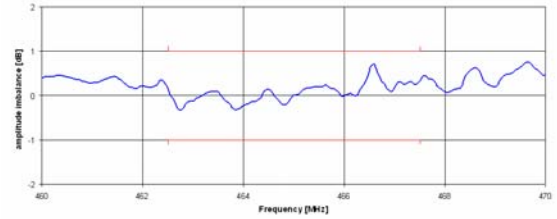

6. Marking

- S...** : Type
- XXZZ** : Date code
- XX** : Year
- ZZ** : Calendar week

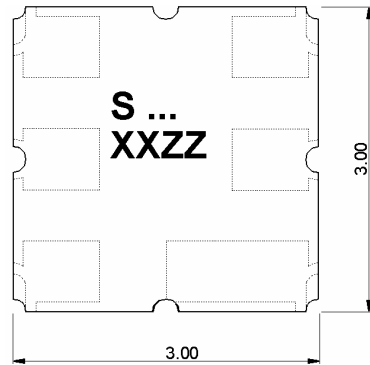

7. Tape & Reel:

1.1 Packing

The product shall be properly packed to avoid damaged during transportation and storage.

1.2 Dimensions

- 1.2.1 Carrier Tape: see Figure 1
- 1.2.2 Reel: see Figure 3


1.3 Reeling Quantity

3.000 pcs/reel

1.4 Taping Structure

1.4.1 Tape & Reel Orientation

The tape shall be wound around the reel in the direction shown below.

	SIPAT Co., Ltd. (CETC No. 26 Research Institute) Nanping Huayuan Road No. 14 Chongqing, China, 400060	Part Number	SF465B
		Rev. Date	2005-5-26
		Rev.	PR6.0

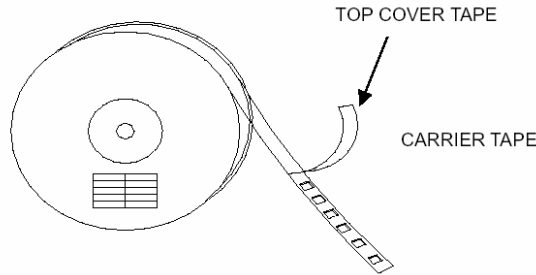


Figure 1 Taping Structure

1.4.2 Label

Device name	S.....
Quantity	3.000
Datecode	

1.4.3 Leader part and vacant position specifications.

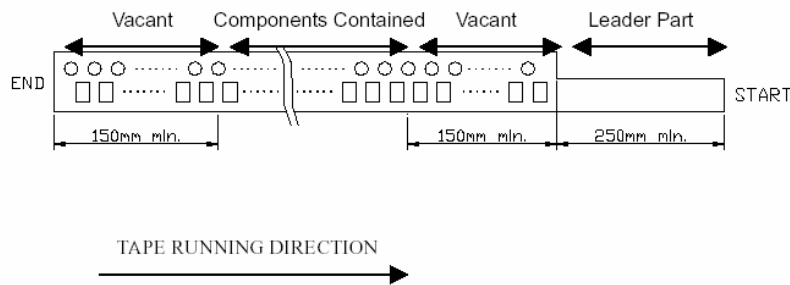



Figure 2 2 Leader specification

1.4.4 Tape Specifications

Tensile Strength of Carrier Tape: 4.4N/mm width
 Top Cover Tape Adhesion (see figure below)
 pull off angle: 0~15°
 speed : 300mm/min.
 force : 20~70g

	SIPAT Co., Ltd. (CETC No. 26 Research Institute) Nanping Huayuan Road No. 14 Chongqing, China, 400060	Part Number	SF465B	
		Rev. Date	2005-5-26	
		Rev.	PR6.0	Page 5/7

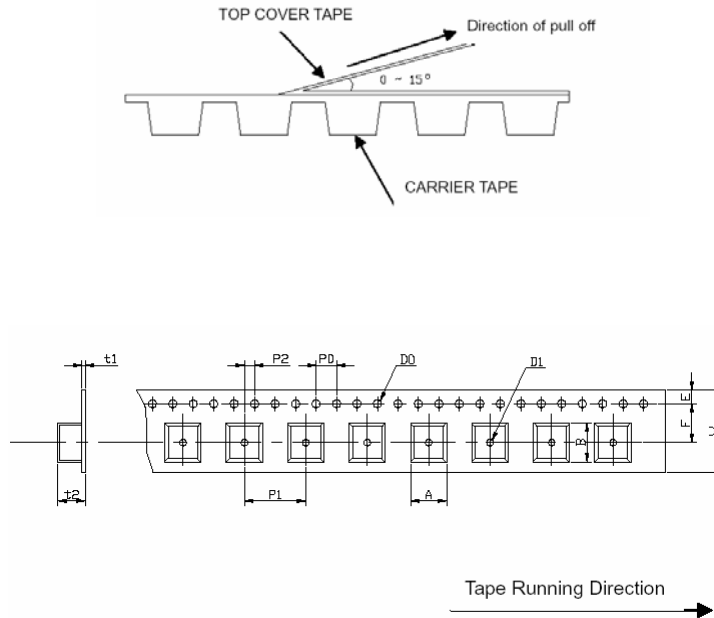


Figure 3 Carrier Tape Dimensions

W	F	E	P0	P1	P2	D0	D1	t1	t2	A	B
12.0	5.5	1.75	4.0	4.0	2.0	Φ1.5	Φ1.5	0.31	1.95	3.3	3.3
±0.3	±0.1	±0.1	±0.2	±0.1	±0.2	±0.1	±0.25	max.	max.	±0.1	±0.1

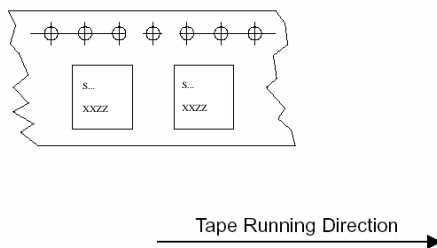


Figure 4 Part Direction

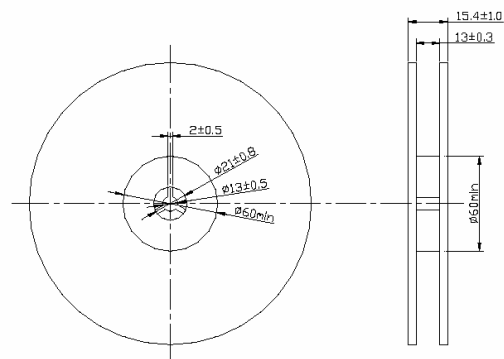



Figure 5 Reel Dimensions

	SIPAT Co., Ltd. (CETC No. 26 Research Institute) Nanping Huayuan Road No. 14 Chongqing, China, 400060	Part Number	SF465B
		Rev. Date	2005-5-26
		Rev.	PR6.0

Remarks

1 Static voltage:


Static voltage between signal load & ground may cause deterioration & destruction of the component. Please avoid static voltage.

2.Ultrasonic cleaning:

Ultrasonic vibration may cause deterioration & destruction of the component. Please avoid ultrasonic cleaning.

3 Soldering:

Only leads of component may be soldered. Please avoid soldering other parts of component.

	SIPAT Co., Ltd. (CETC No. 26 Research Institute) Nanping Huayuan Road No. 14 Chongqing, China, 400060	Part Number	SF465B	
		Rev. Date	2005-5-26	
		Rev.	PR6.0	Page 7/7