



塔放双工器 / Duplexer For Tower Amplifier II

1. Specifications

技术指标 Specifications	SDP-1.9/60		SDP-1.9/60T	
工作频率 Operating Frequency	接收 Rx	发射 Tx	接收 Rx A-C, B-D	发射 Tx A-B
	1850~1910 MHz	1930~1990MHz	1850~1910 MHz	1930~1990MHz
插入损耗(dB) Insertion Loss	≤1.1dB	≤1.4dB	≤1.0dB	≤0.8dB
带外抑制(dB) Out Band Attenuation	≥90@1930~1990MHz ≥90@1850~1910 MHz		A—C≥70@1930~1990MHz B—D≥70@1930~1990MHz A—B≥30@1850~1910 MHz	
回波损耗(dB) Return Loss	18dB		18dB	
体积 Dimension	192 mm×143mm×44mm		226.5 mm×155mm×73.5mm	
端口 Connector	SMA-KF		SMA-KF ; N-KF	



SIPAT Co.,Ltd

www.sipatsaw.com

China Electronics Technology Group Corporation No.26 Research Institute

2. Package







SIPAT Co.,Ltd





www.sipatsaw.com

China Electronics Technology Group Corporation No.26 Research Institute

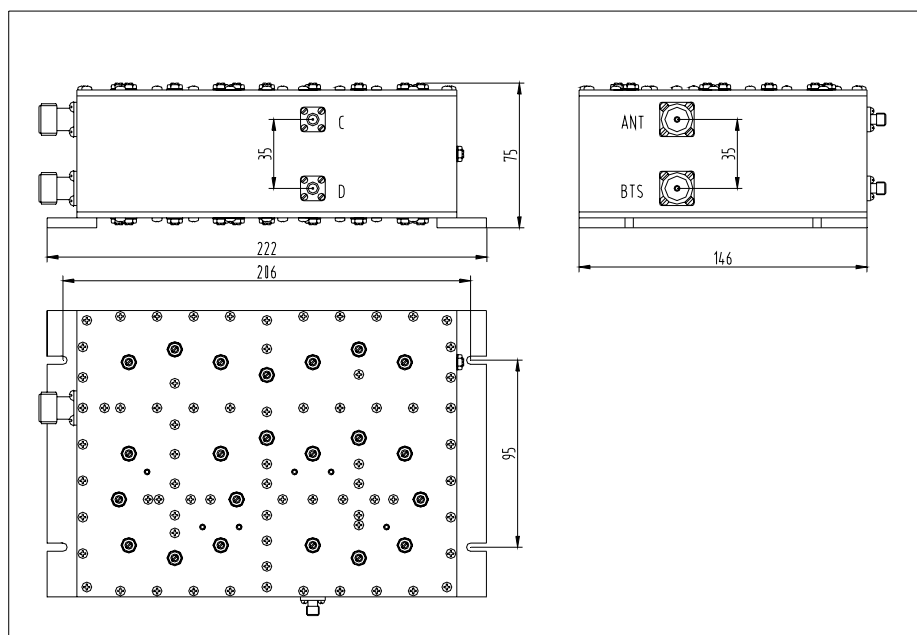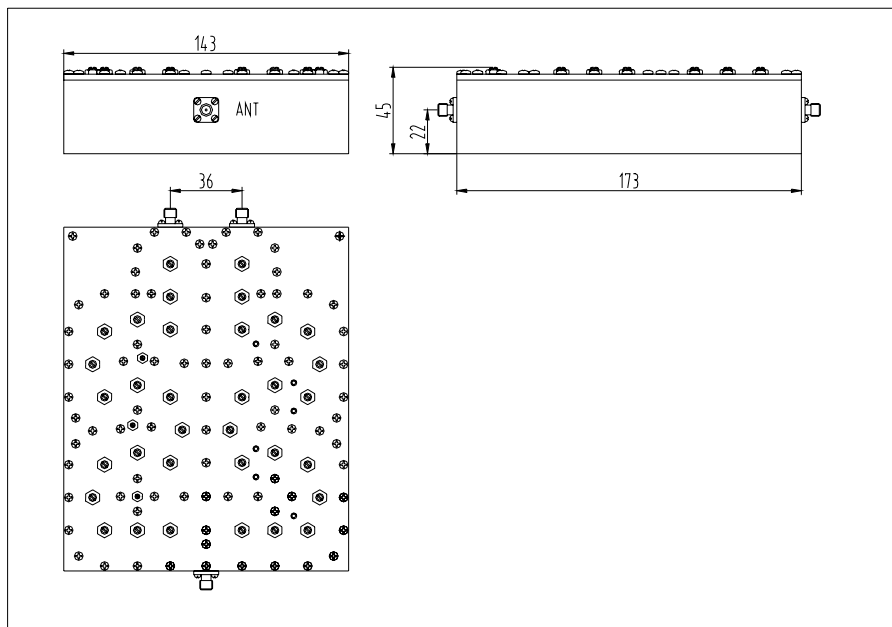



3. Typical Performance

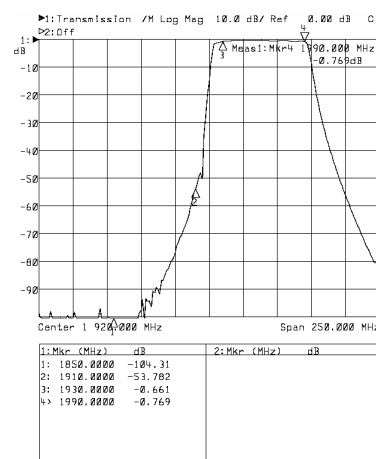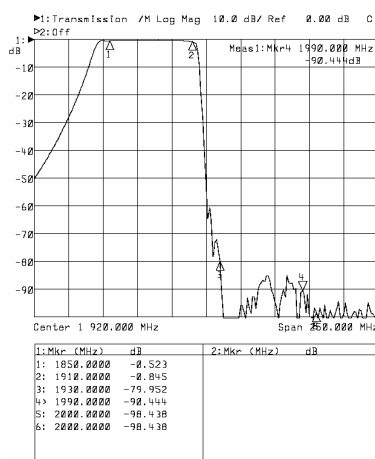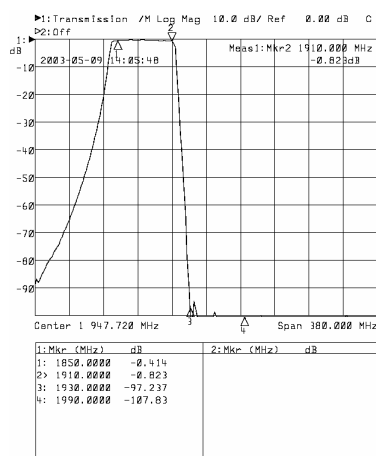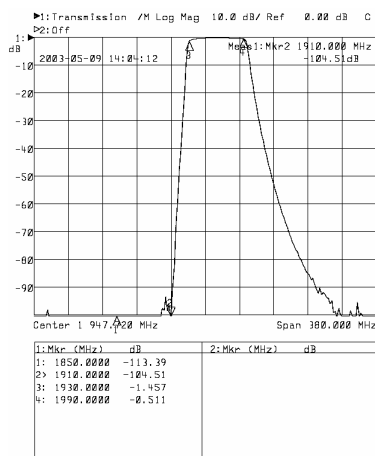

用途：移动通信塔顶放大器专用