



## 高功率 GSM 收发双工器



### High Power Rx-Tx Duplexer For GSM

#### 1. Specifications

技术指标 Specifications	DCF-9/25B		SDP-9/25C	
	接收 Rx	发射 Tx	接收 Rx	发射 Tx
工作频率 Operating Frequency	890-915 MHz	935-960MHz	890-915 MHz	935-960MHz
插入损耗(dB) Insertion Loss	≤1.0dB	≤0.5dB	≤1.1dB	
带内波动(dB) In Band Ripple	≤0.5dB	≤0.3dB	≤0.5dB	
回波损耗(dB)	≥18dB		≥18dB	
隔离	≥80dB@935-960M Hz	≥60dB@890-91 5MHz	≥80dB	
功率容量	150W		60W	
体积	250 mm×135mm×115mm		178mm×95mm×52mm	
端口	SMA-KF;N-KF;7/16-KF		SMA-KF	



## 2. Package

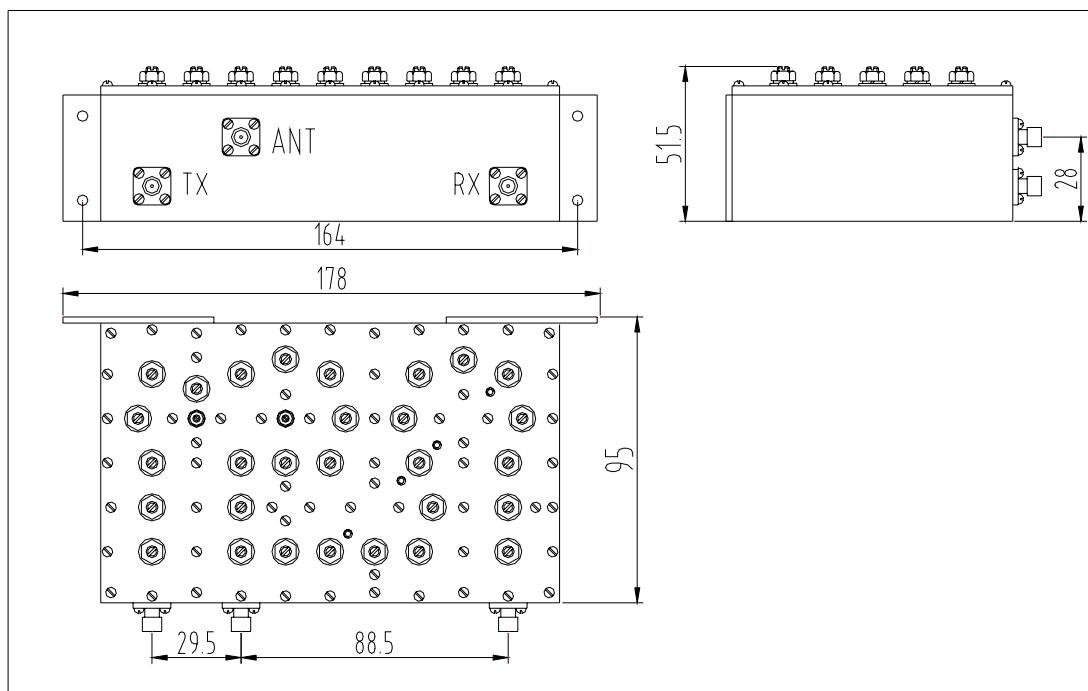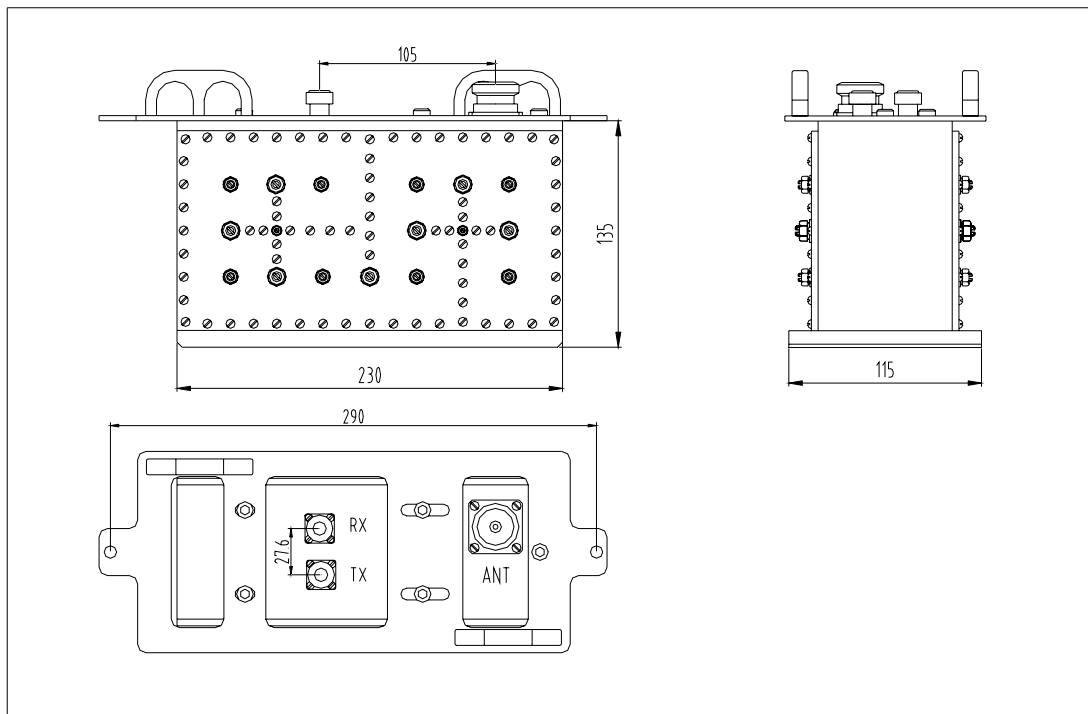



**SIPAT Co.,Ltd**



[www.sipatsaw.com](http://www.sipatsaw.com)

China Electronics Technology Group Corporation No.26 Research Institute





## 3. Typical Performance

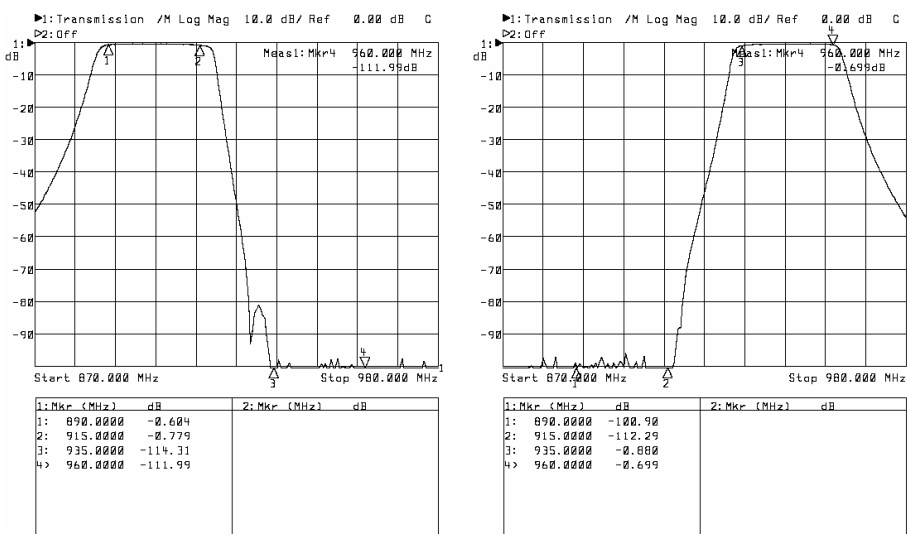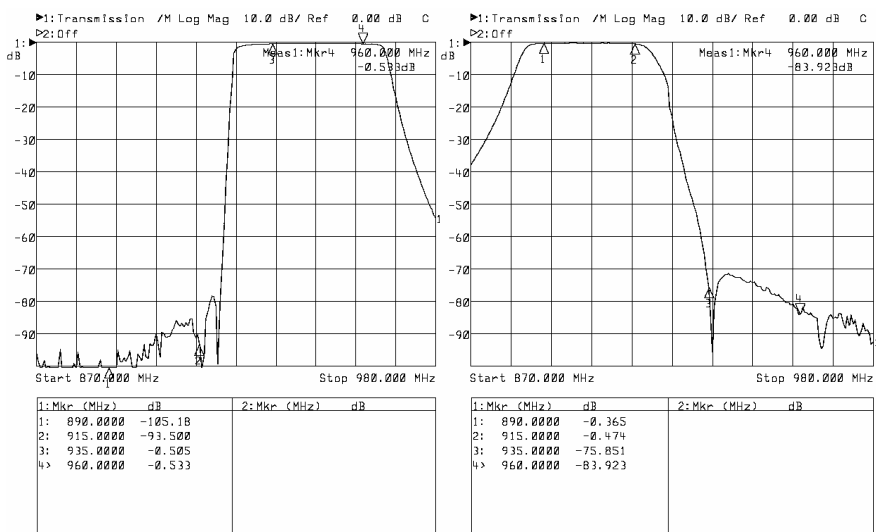

用途: GSM 基站, 直放站, 天线, 基站放大器