



CDMA 收发双工器、滤波器



Tx/Rx Duplexer, Filter for CDMA

1. Specifications

技术指标 Specifications	SDP-8D		SQF-8D/ R	SQF-8D/ T
	接收 Rx	发射 Tx	接收 Rx	发射 Tx
工作频率 Operating Frequency	825-835MHz	870 -880MHz	825-835 MHz	870-880MHz
插入损耗(dB) Insertion Loss	≤2.2dB	≤2.2dB	≤2.2dB	≤2.2dB
带内波动(dB) In Band Ripple	≤1.0dB	≤1.0dB	≤1.0dB	≤1.0dB
带外抑制(dB) Out Band Attenuation	≥95dB@870-880MHz ≥45dB@ f0±7.5MHz (高低温 40dB)	≥95dB@825-835MHz ≥45dB@ f0±7.5MHz (高低温 40dB)	≥95dB@870-880MHz ≥45dB@ f0±7.5MHz (高低温 40dB)	≥95dB@825-835MHz ≥45dB@ f0±7.5MHz (高低温 40dB)
回波损耗(dB) Return Loss	≥18dB			
工作温度 Operating Temperature	-20℃~60℃			
功率容量 Power Capacity	150W			
体积 Dimension	202 mm×202mm×79mm		202mm×104mm×79mm	
端口 Connector	SMA-KF or N-KF			





2. Package

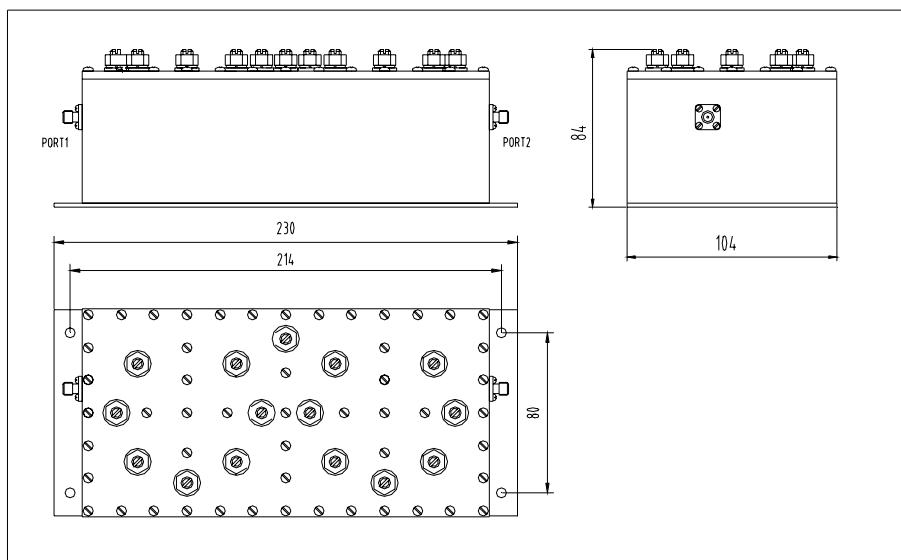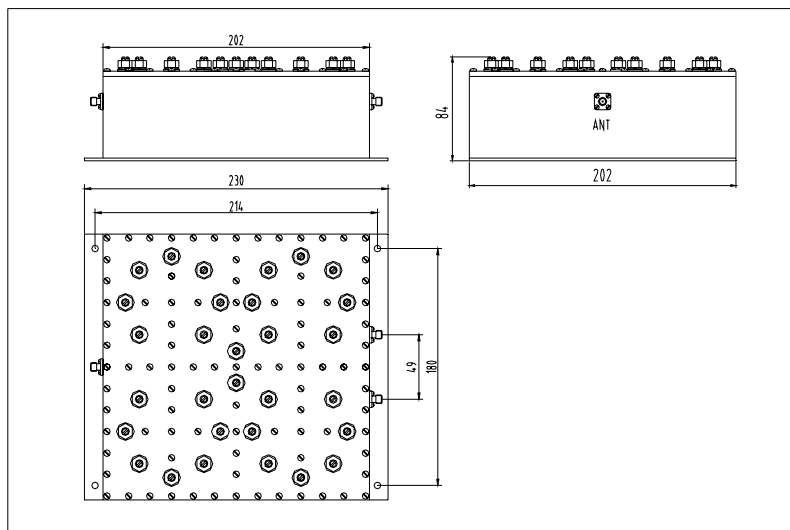



3. Typical Performance

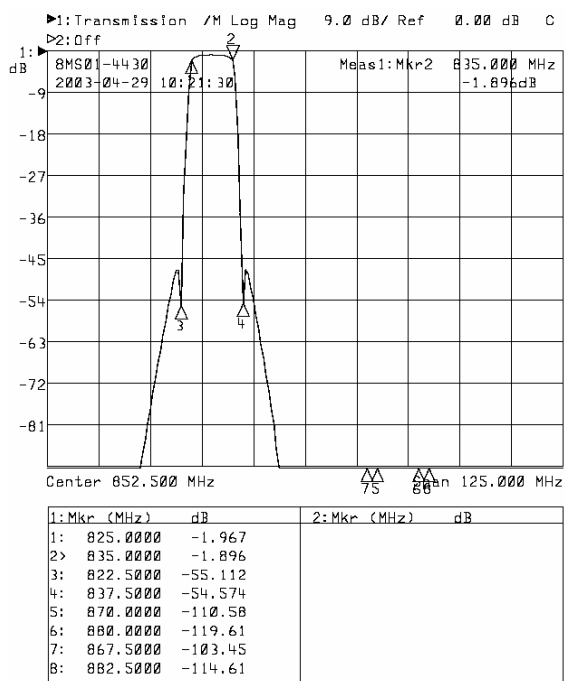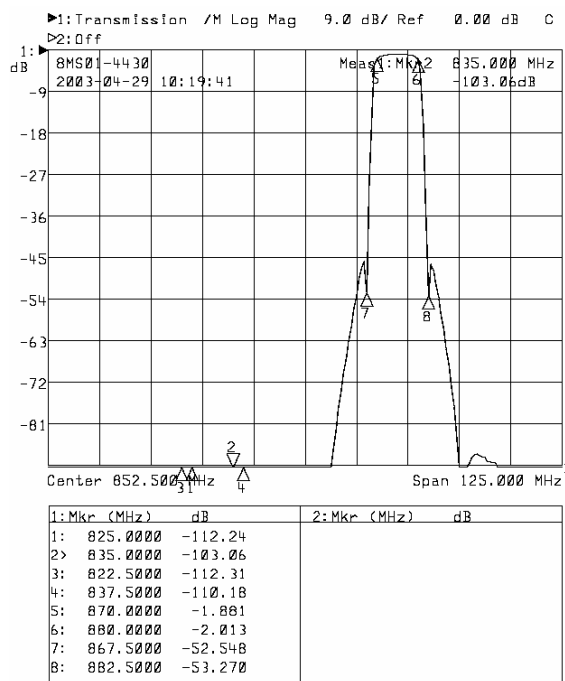

用途: CDMA 室内分布系统, 直放站, 天线