



CDMA 收发双工器、滤波器 III



Tx/Rx Duplexer, Filter for CDMA III

1. Specifications

技术指标 Specifications	SDP-8A		SQF-8/10A
	接收	发射	
工作频率 Operating Frequencies	825-835MHz	870-880MHz	825-835MHz
带外抑制 Out Band attenuation	≥85dB@870-880MHz ≥40dB@821MHz	≥85dB@825-835MHz ≥40dB@885MHz	≥35dB @ 821MHz ≥60dB @ 870-2000MHz
插入损耗 Insertion Loss	≤1.7dB		≤1.2dB
回波损耗 Return Loss	≥18dB		≥18dB
带内波动 In Band Ripple	≤0.7dB		≤0.5dB
耦合度 Coupling	32±2dB @ 825-835MHz & 870-880MHz		30±0.5dB
功率容量 Power Capacity	50W		
体积 Dimension	159 mm×114mm×56mm		
端口 Connector	SMA-KF		





2. Package

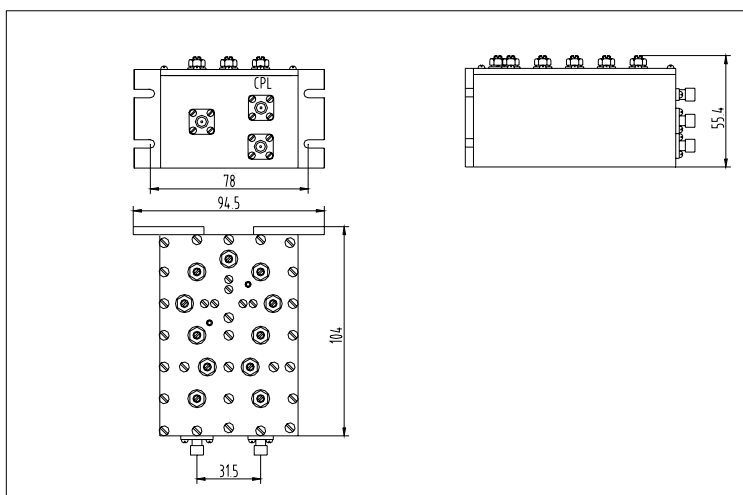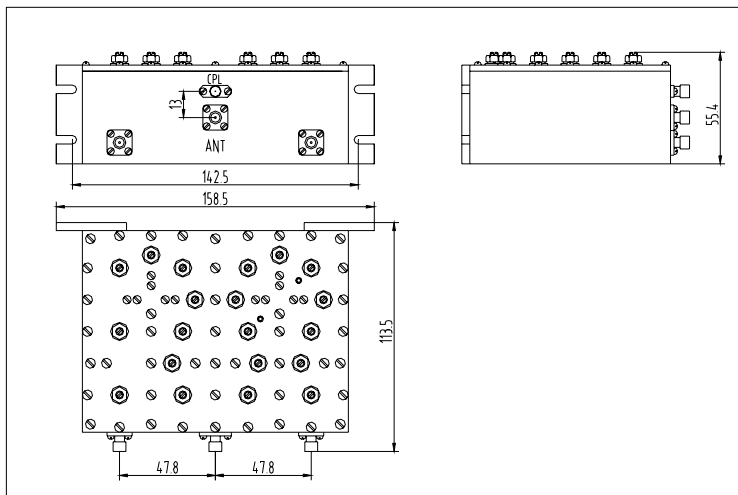



3. Typical Performance

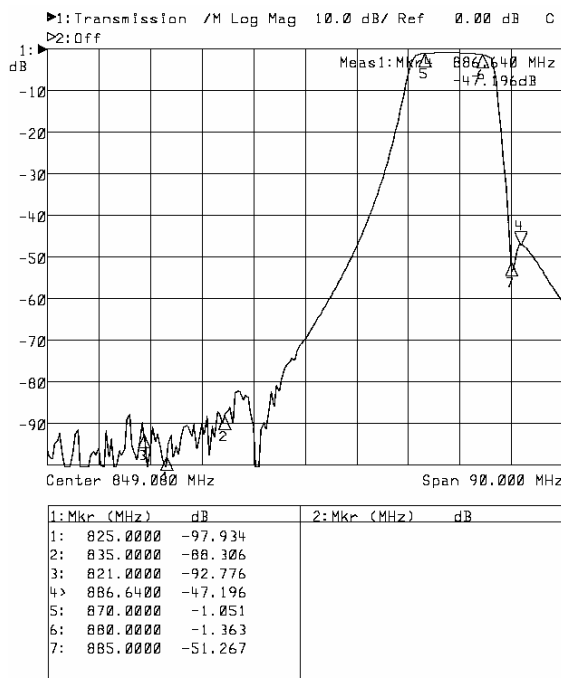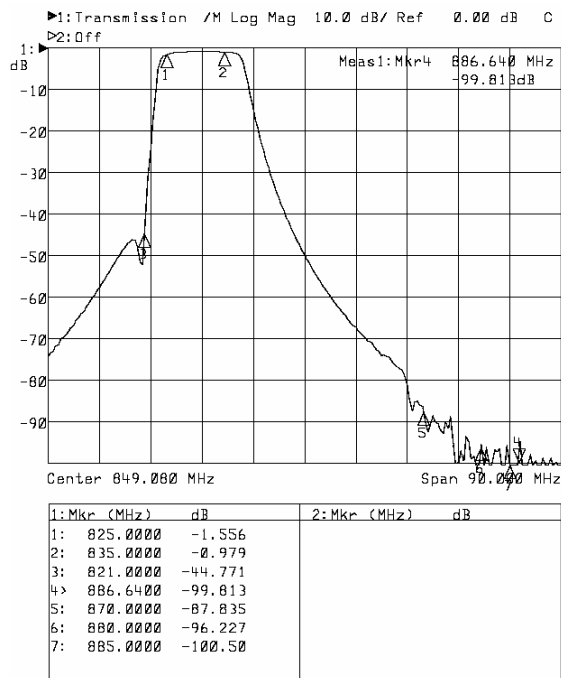

用途： CDMA 室内分布系统，直放站，天线