



DCS 收发双工器 II / Rx-Tx Duplexer for DCS II

1. Specifications

技术指标 Specifications		SDP-18/10	SDP-18/15	SDP-18/25	SDP-18/45	SDP-19/15
工作频率 Operating Frequency	接收 Rx	1745-1755MHz	1710-1725MHz	1725-1750MHz	1710-1755MHz	1895-1910 MHz
	发射 Tx	1840-1850MHz	1805-1820MHz	1820-1845MHz	1805-1850MHz	1975-1990 MHz
插入损耗(dB) Insertion Loss		≤1.3dB			≤1.0dB	≤1.2dB
带内波动(dB) In Band Ripple		≤0.5dB			≤0.5dB	≤0.5dB
回波损耗(dB) Return Loss		≥18dB				
隔离 Isolation		≥95dB			≥75dB	≥95dB
功率容量 Power Capacity		60W				
体积 Dimension		158mm×104mm×36mm				
端口 Connector		SMA-KF				





SIPAT Co.,Ltd

www.sipatsaw.com



China Electronics Technology Group Corporation No.26 Research Institute

2. Package

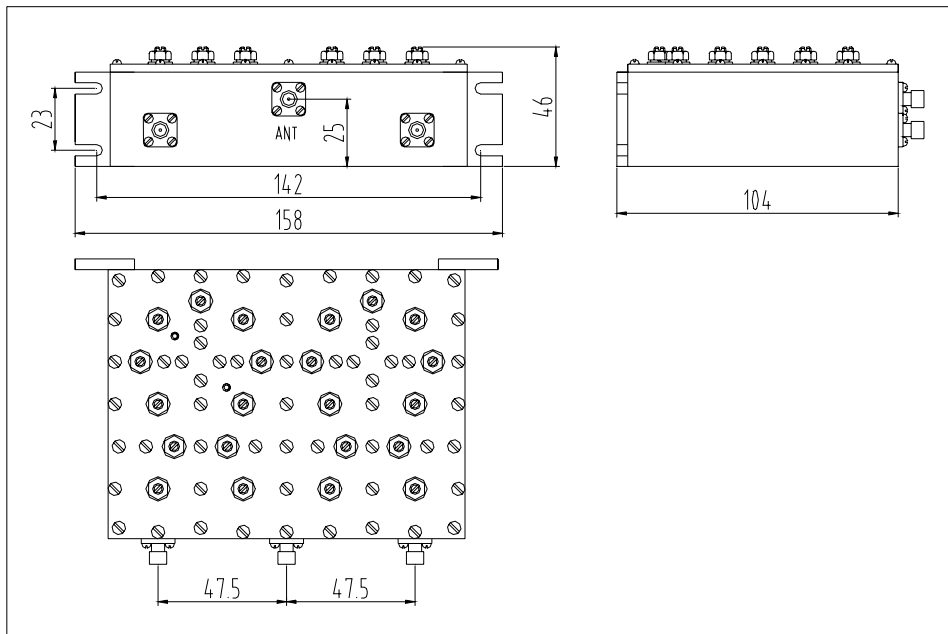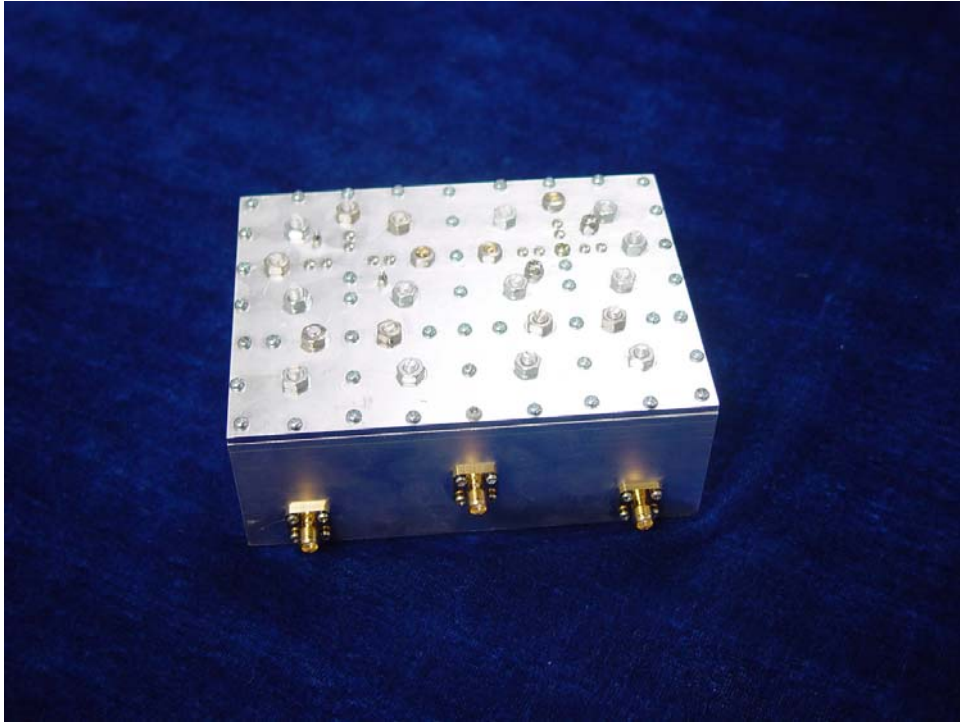



3. Typical Performance

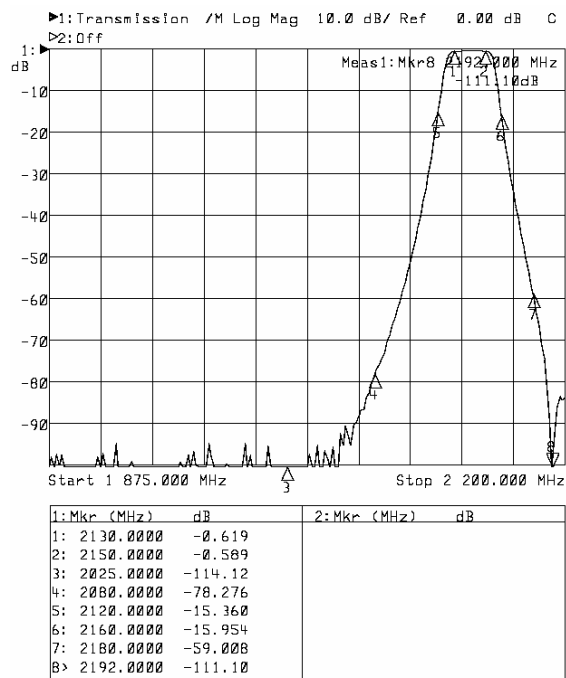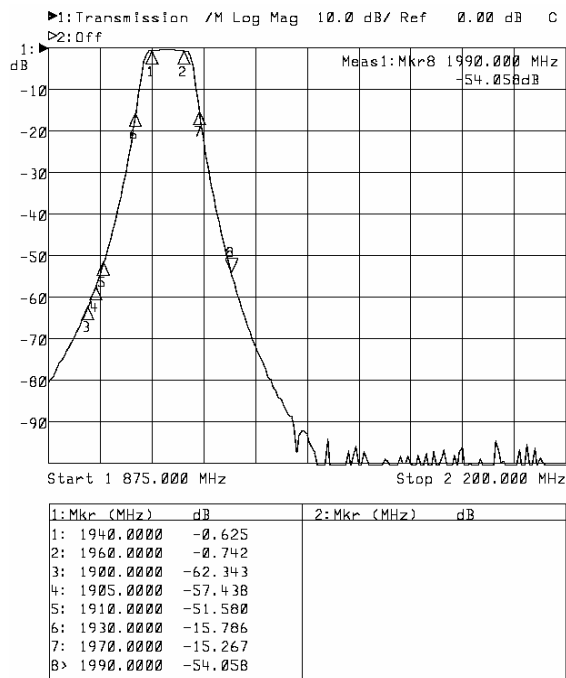

用途：移动通信室内分布系统，直放站，天线