





GSM 收发双工器 / Rx-Tx Duplexer for GSM

1. Specifications

技术指标 Specifications	SDP-9/25		SDP-9/19		SDP-9/6	
	接收 Rx	发射 Tx	接收 Rx	发射 Tx	接收 Rx	发射 Tx
工作频率 Operating Frequency	890-915MH	935 -960MHz	890-909MHz	935-954MHz	909-915MHz	954-960MHz
插入损耗(dB)	≤1.3dB		≤1.5dB		≤1.5dB	
带外抑制(dB) Out Band Attenuation	≥65dB@上、下行之间		≥15dB@f0±15MHz		≥70dB@接收对 880MHz	
收发隔离 Isolation	≥65dB		≥78dB		≥85dB	
回波损耗(dB) Return Loss	≥18dB					
功率容量 Power Capacity	30W					
体积 Dimension	192mm×84mm×44mm					
端口 Connector	SMA-KF					





2. Package

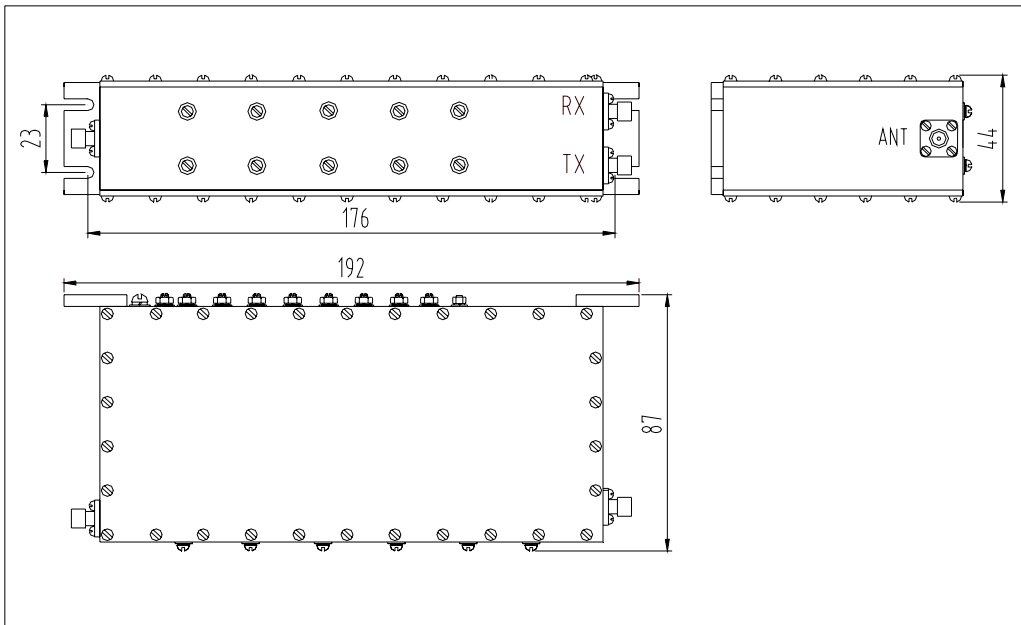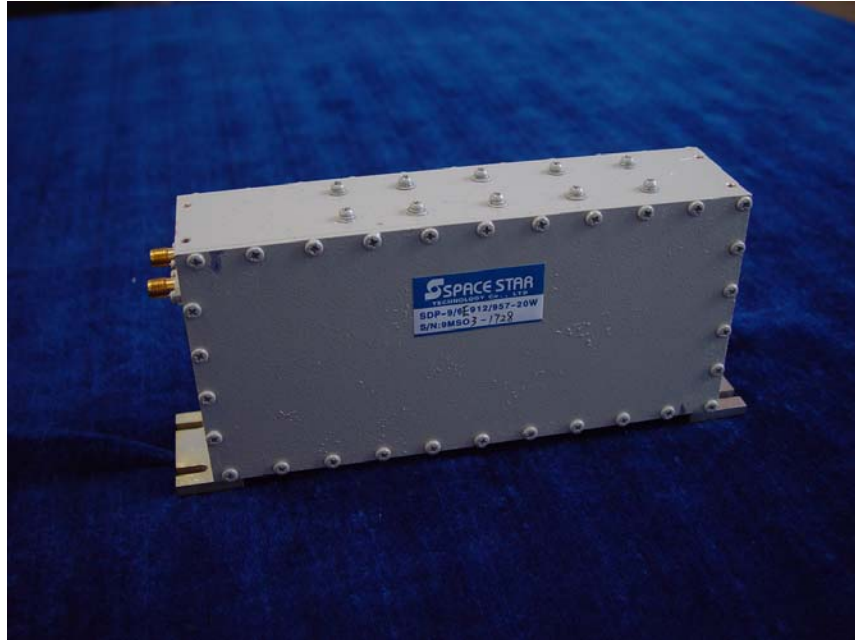



3. Typical Performance

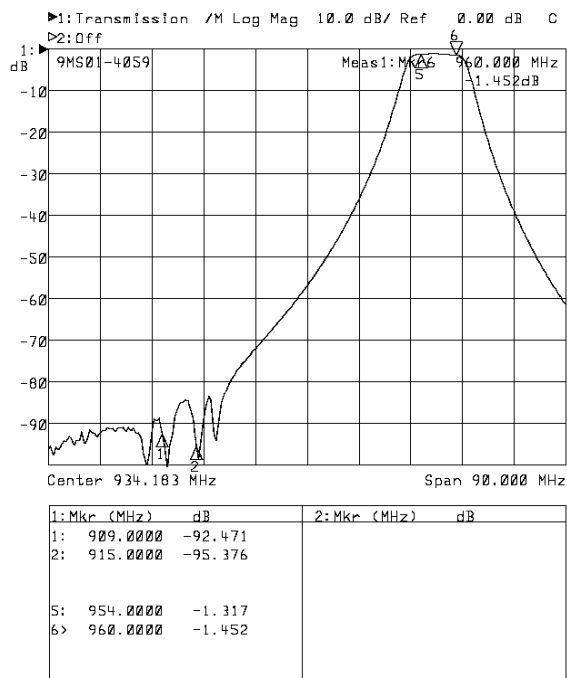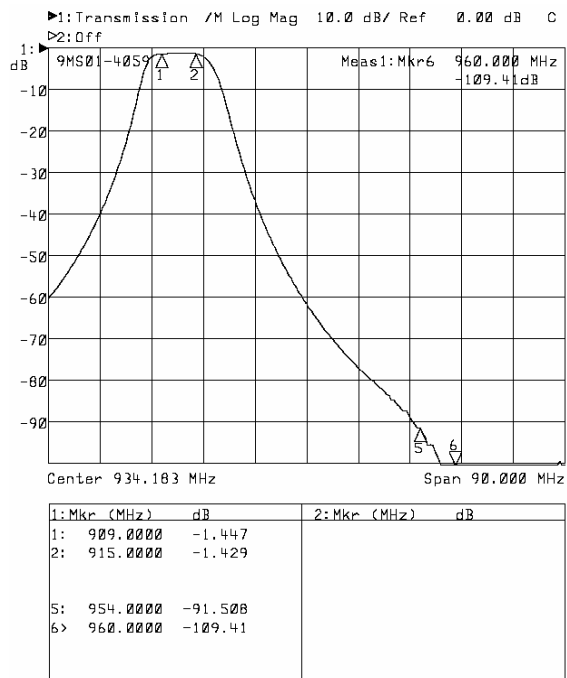

用途：移动通信室内分布系统，直放站，天线