




GSM 滤波器 / Filter for GSM

1. Specifications

技术指标 Specifications		SQF-9/25	SQF-9/19	SQF-9/6	SQF-8/10
工作频率 Operating Frequency	上行	890-915 MHz	890-909 MHz	905-915 MHz	825-835 MHz
	下行	935-960 MHz	935-354 MHz	954-960 MHz	870-880 MHz
插入损耗(dB) Insertion Loss		≤1.5dB	≤1.5dB	≤1.5dB	≤1.5dB
回波损耗(dB) Return Loss		≥18dB	≥18dB	≥18dB	≥18dB
抑制(@上,下行之间) Out Band Attenuation		≥65dB	≥65dB	≥70dB	≥75dB
功率容量 Power Capacity		30W			
体积 Dimension		192mm×87mm×21mm			
端口 Connector		SMA-KF			




2. Package

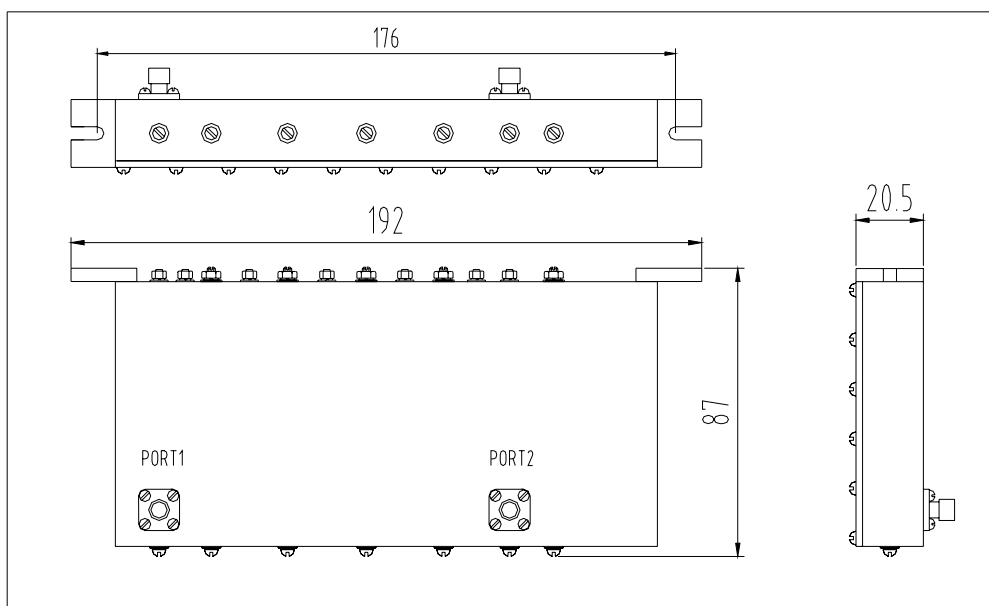



3. Typical Performance

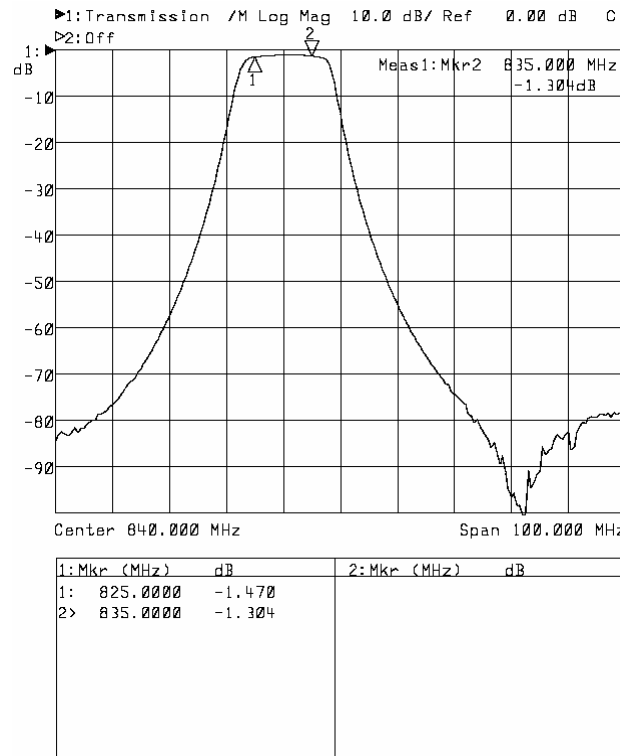

用途: GSM、CDMA 移动通信室内分布系统, 基站放大器, 塔顶放大器、天线