



Features

- ◇ For IF SAW filter
- ◇ Single-ended operation
- ◇ Ceramic Surface Mount Package
- ◇ Small size
- ◇ RoHS compliant (2002/95/EC), Pb-free

Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	69.8	70	70.2
Insertion Loss	dB	-	15.4	18.5
1.2 dB Bandwidth	MHz	27.2	27.38	-
3 dB Bandwidth	MHz	28	28.98	-
35dB Bandwidth	MHz	-	34.2	34.65
Passband Variation($f_0 \pm 12.5\text{MHz}$)	dB	-	0.9	1
Group Delay Variation($f_0 \pm 12.5\text{MHz}$)	nsec	-	100	120
Absolute Delay	usec	-	1.03	-
Ultimate Rejection	dB	35	40	-
Material Temperature coefficient	KHz/°C	-6.58		
Substrate Material	-	YZ LN		
Ambient Temperature	°C	25		
Operating Temperature Range	°C	-40	-	+85
Storage Temperature Range	°C	-45	-	+105
DC Voltage	V	0		
Input Power	dBm	-	-	10
ESD Class	-	1A		
Package Size	SMD13.3*6.5			

Notes:


1. All specifications are based on the test circuit shown;
2. In production, all specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature;
3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances;
4. This is the optimum impedance in order to achieve the performance show.



SIPAT Co., Ltd.
(CETC No.26 Research Institute)
#14 Nanping Huayuan Road,
Chongqing, China, 400060

Part Number	LB070DS25		
Rev. Date	2008-11-25		
Ver.	1.0	Page 1/3	


Matching Configuration

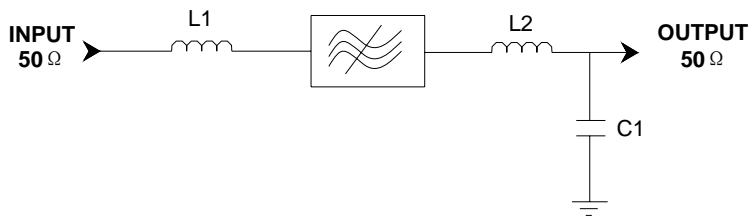

L1=L2=180nH
C1=22pF
Source/Load Impedance=50 ohm

Notes - Component values may change depending on board layout.

Package Dimension

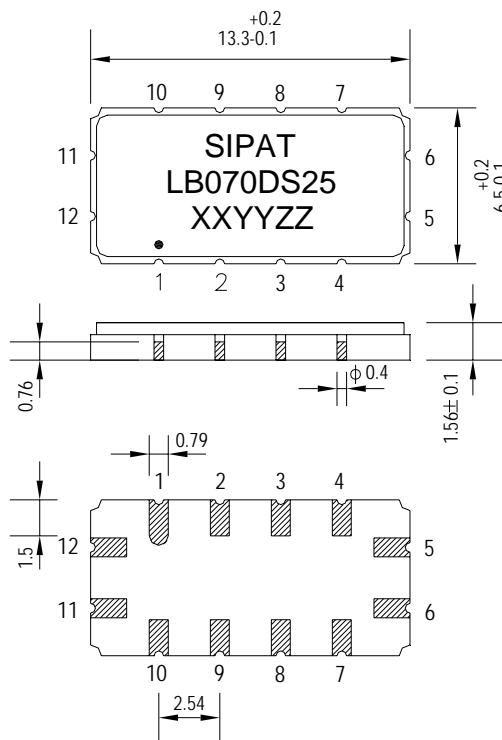

Pad Configuration:

Input: 11
Output: 5
Ground: All Others

Marking Configuration:

- 1) •: Pad Number 1 Index
- 2) SIPAT: Manufacturer Name
- 3) LB070DS25: Part Number
- 4) XXYY: Date(Year/month)
- 5) ZZ: Identified Code

Package: SMD13.3*6.5

Unit: mm




SIPAT Co., Ltd.
(CETC No.26 Research Institute)
#14 Nanping Huayuan Road,
Chongqing, China, 400060

Part Number	LB070DS25	
Rev. Date	2008-11-25	
Ver.	1.0	Page 2/3


Typical Performance

Frequency Respond

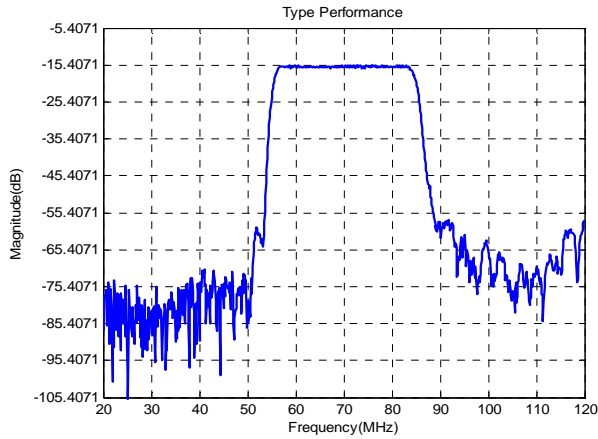


Horizontal: 10MHz/Div Vertical: 10dB/Div

Passband Respond

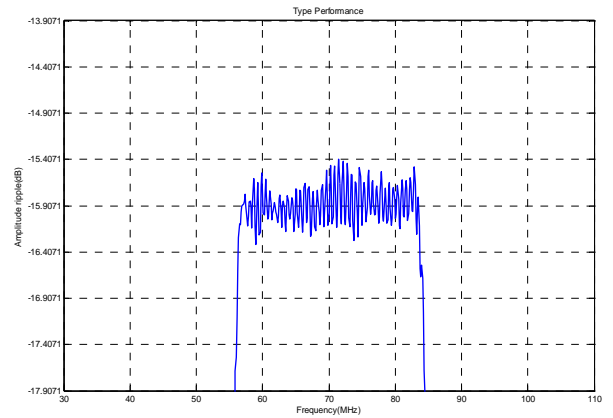


Horizontal: 10MHz/Div Vertical: 0.5dB/Div

Group Delay Variation($f_0 \pm 12.5\text{MHz}$)

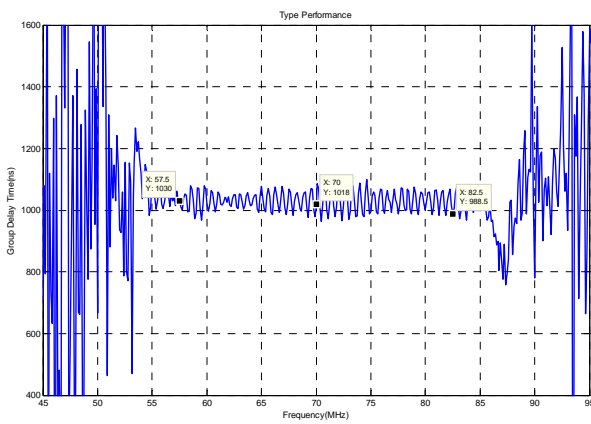


Horizontal: 5MHz/Div Vertical: 200ns/Div

Phase Linearity($f_0 \pm 12.5\text{MHz}$)

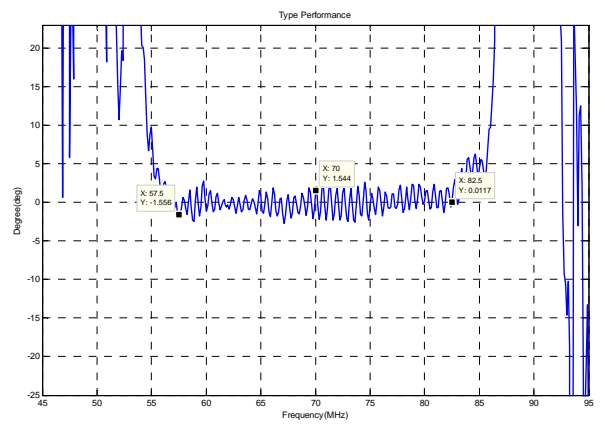


Horizontal: 5MHz/Div Vertical: 5deg/Div

Smith Chart S11

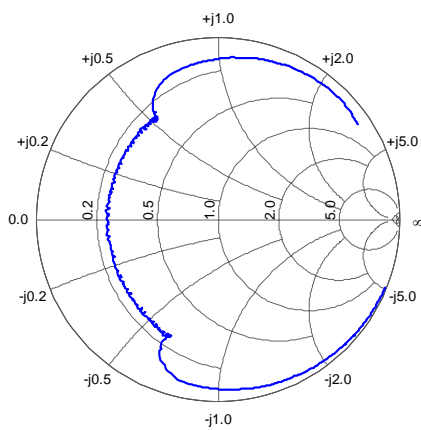

Smith Chart S22

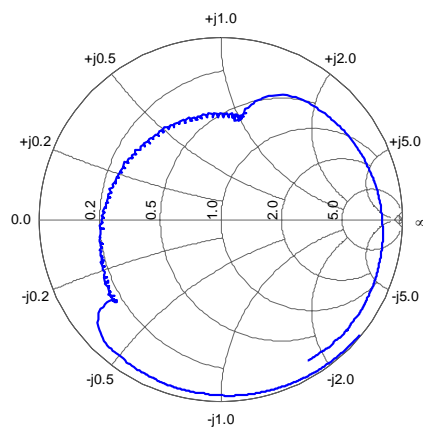

SIPAT Co., Ltd.
(CETC No.26 Research Institute)
#14 Nanping Huayuan Road,
Chongqing, China, 400060

Part Number	LB070DS25	
Rev. Date	2008-11-25	
Ver.	1.0	Page 3/3