Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	69.92	70	70.08
Insertion Loss	dB	-	24.6	26
1 dB Bandwidth	MHz	1.8	1.96	-
3 dB Bandwidth	MHz	2	2.3	-
40 dB Bandwidth	MHz	-	3.5	3.8
50 dB Bandwidth	MHz	-	3.7	-
Passband Variation	dB	-	0.3	0.7
Absolute Delay	usec	-	2.85	-
Phase Linearity(f0±0.9MHz)	deg	-	3	4
Group Delay Variation(f0±0.9MHz)	nsec	-	50	90
Ultimate Rejection	dB	50	56	-
Material Temperature coefficient	KHz/°C	0.07		
Ambient Temperature	°C	25		
Package Size	DIP2212 (22.2x12.8x4.7mm3)			

Notes:

1. All specifications are based on the test circuit shown
2. In production, devices will be tested at room temperature to a guardbanded specification to ensure electrical compliance over temperature
3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
4. This is the optimum impedance in order to achieve the performance show

Matching Configuration



L1=(220+120)nH
L2=(330+39)nH
Source/Load Impedance=50 ohm

Notes - Component values may change depending on board layout.

Package Dimension

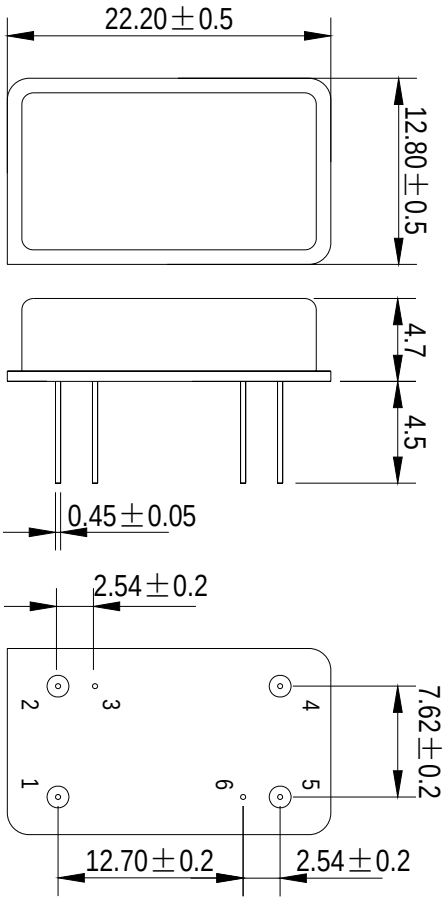

Input	1
Output	5
Ground	2,3,4,6

Package: DIP2212

Unit: mm

Typical Performance

Frequency Respond

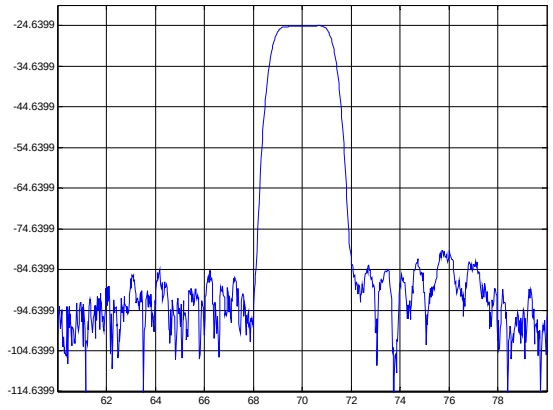

Passband Respond

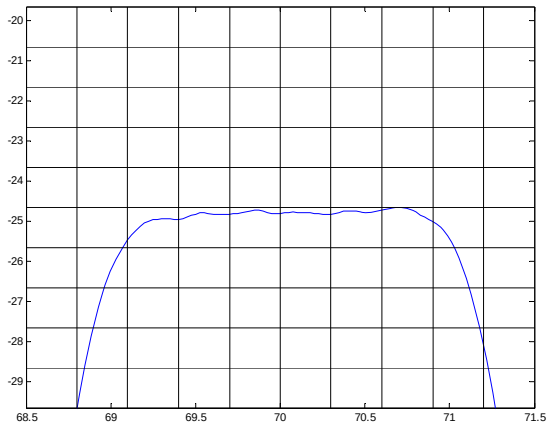

Group Delay Variation(f0±0.9MHz)

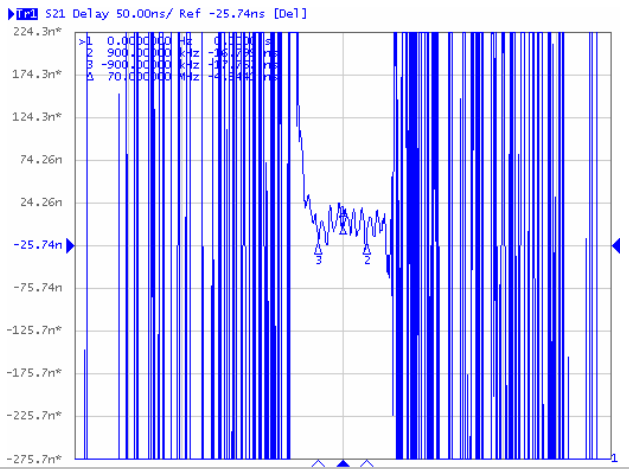

Phase Linearity(f0±0.9MHz)

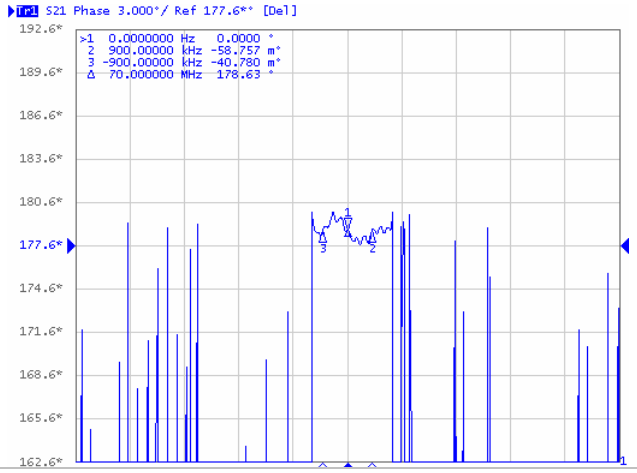

Smith Chart S11

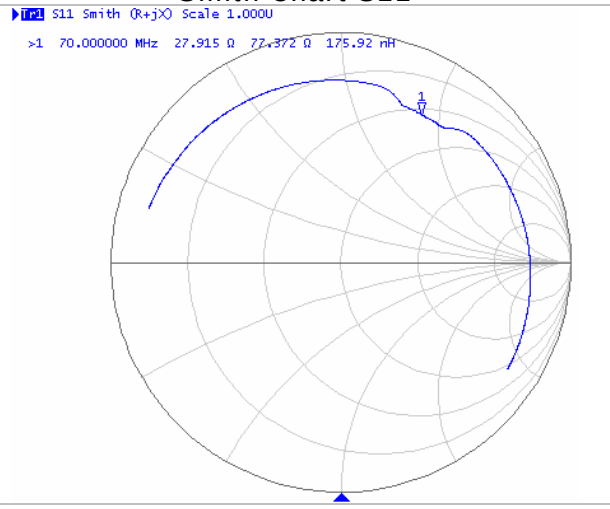

Smith Chart S22